


## HFC – Heated Fin (Cable)

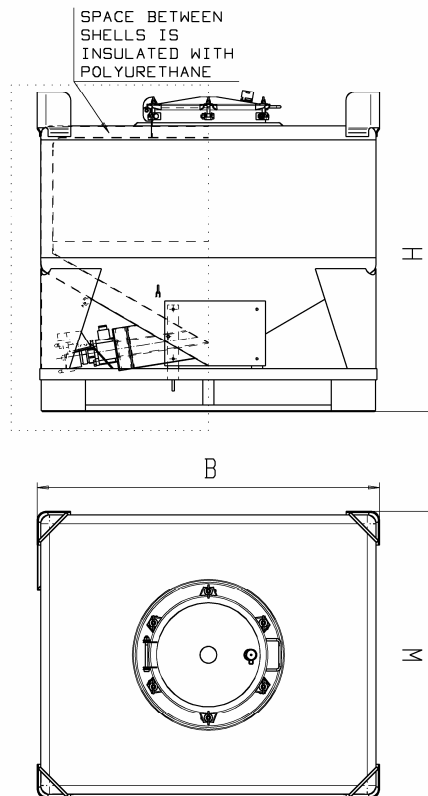

Type	Capacity (l)	Length B (mm)	Width W (mm)	Height H (mm)	2 Stacked height	Tare weight (kg/AISI304)	Gradient of bottom	Material
HFC500	500	1225	1025	1148	2266	260	30°	AISI304
HFC800	800	1225	1025	1440	2850	280	30°	AISI316
HFC1000	1000	1225	1025	1640	3250	300	30°	

- ⇒ UN Approved Type31A
- ⇒ Double shell; space between shells includes cable heating and insulation
  - Power of heating cable 800 - 2000 W, controlled with thermostat
- ⇒ Handling with crane from four corners or with forklift or pallet truck from any side
- ⇒ Stackable
- ⇒ Customizable depending on product requirements and customer preferences
  - Material, connections and accessories can be selected to best suit your needs

Type	Stacking on a flat surface	Max liquid relative density	DWG
HFC500-1000	Up to three	1,9 kg/dm <sup>3</sup>	3978-1