


HS – Heated Square

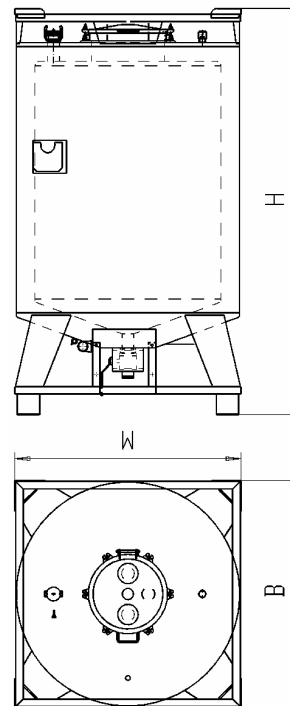

Type	Capacity (l)	Length B (mm)	Width W (mm)	Height H (mm)	2 Stacked Height	Tare Weight (kg/AISI304)	Gradient * of bottom	Material
HS500	500	1215	1215	1500	2970	225	20°	AISI304 AISI316
HS600	600	1038	1038	1710	3390	250	20°	
HS820	820	1215	1215	1935	3840	210	20°	
HS1000	1000	1215	1215	2180	4330	370	20°	

⇒ **Heated and insulated or plain insulated**

- Heating power 50 – 3000 W

⇒ **Handling with crane from four corners or with forklift or pallet truck from any side**

⇒ **Stackable**

⇒ **Customizable depending on product requirements and customer preferences**

- Material, connections and accessories can be selected to best suit your needs
- *The gradient of the IBC base can be changed up to 60°

Type	Stacking on a flat surface
HS500-HS1000	Up to two